



NIPPON KAIJI KYOKAI

Certificate

Certificate No.
10EQ618FPA(R)-1

OF

APPROVAL

Item : A-60 class deck
Type : A-60 Deck 40mm Rockwool Marine Firebatts 130
Specification : See Annex.
Manufacturer : Rockwool A/S
Hovedgaden 501, 2640 Hedehusene, Denmark
Testing standard : FTP Code Annex1 / Part 3
Test report
Test laboratory : Danish Institute of Fire and Security Technology
Report number : G10141

THIS IS TO CERTIFY that the above type of products has been approved by Nippon Kaiji Kyokai with type approval No. 96FPA14DA, and that the products of the above type will be accepted for use onboard ships classed with the Society as complying with the relevant requirements of the Society's *Rules for the Survey and Construction of Steel Ships* and those of the *International Convention for the Safety of Life at Sea, 1974, as amended*, subject to the approval of the flag Administration and conditional upon the manufacturer having a quality control system audited by a competent authority to ensure continuous compliance with the type approval conditions.

This certificate is valid until 24th September, 2015.
Issued at Tokyo on 15th November, 2010.

NIPPON KAIJI KYOKAI




H. Takano

General Manager

Material and Equipment Department



Initial approval date : 25th September, 1996

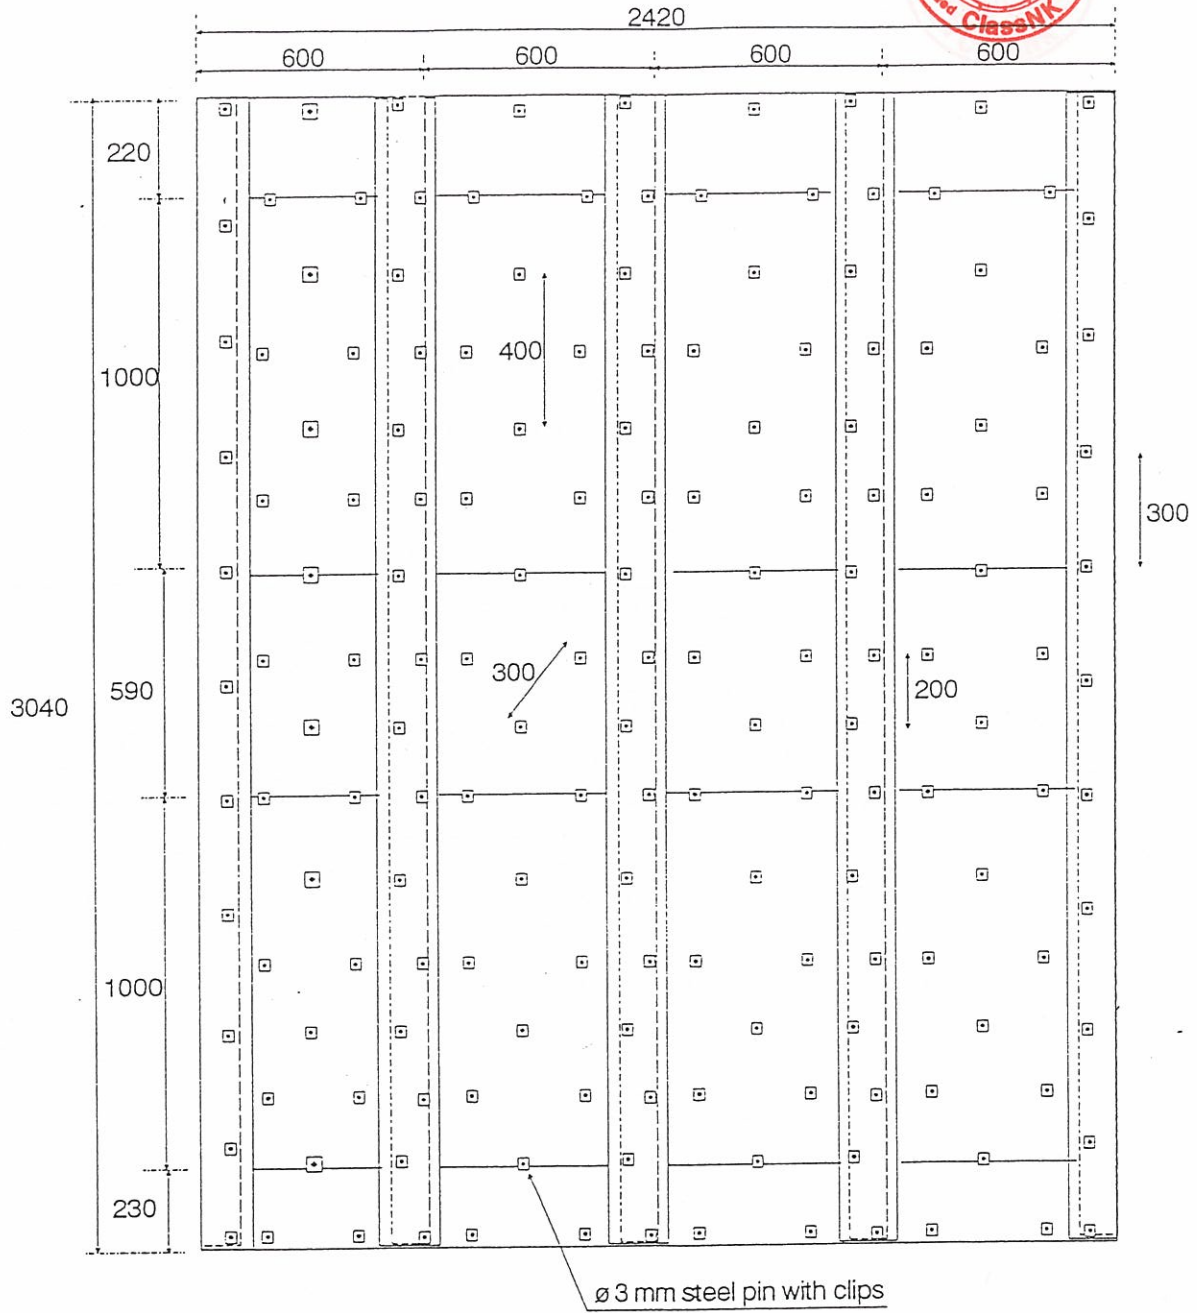


Rockwool A/S

Date: 12.02.1996


A-60 deck
fire insulated with
40 mm Rockwool Marine Fire batts 130.

Drawing nr.:


1c

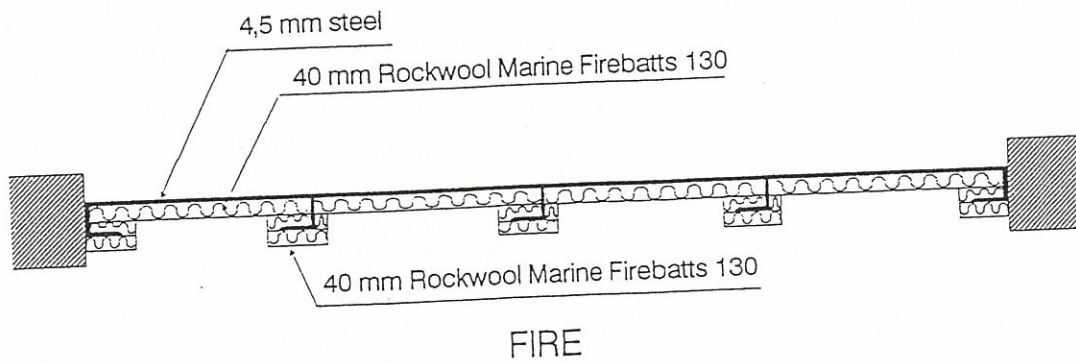

Rockwool A/S	A-60 deck fire insulated with 40 mm Rockwool Marine Fire batts 130.	Drawing nr.: 2c
Date: 12.02.1996		

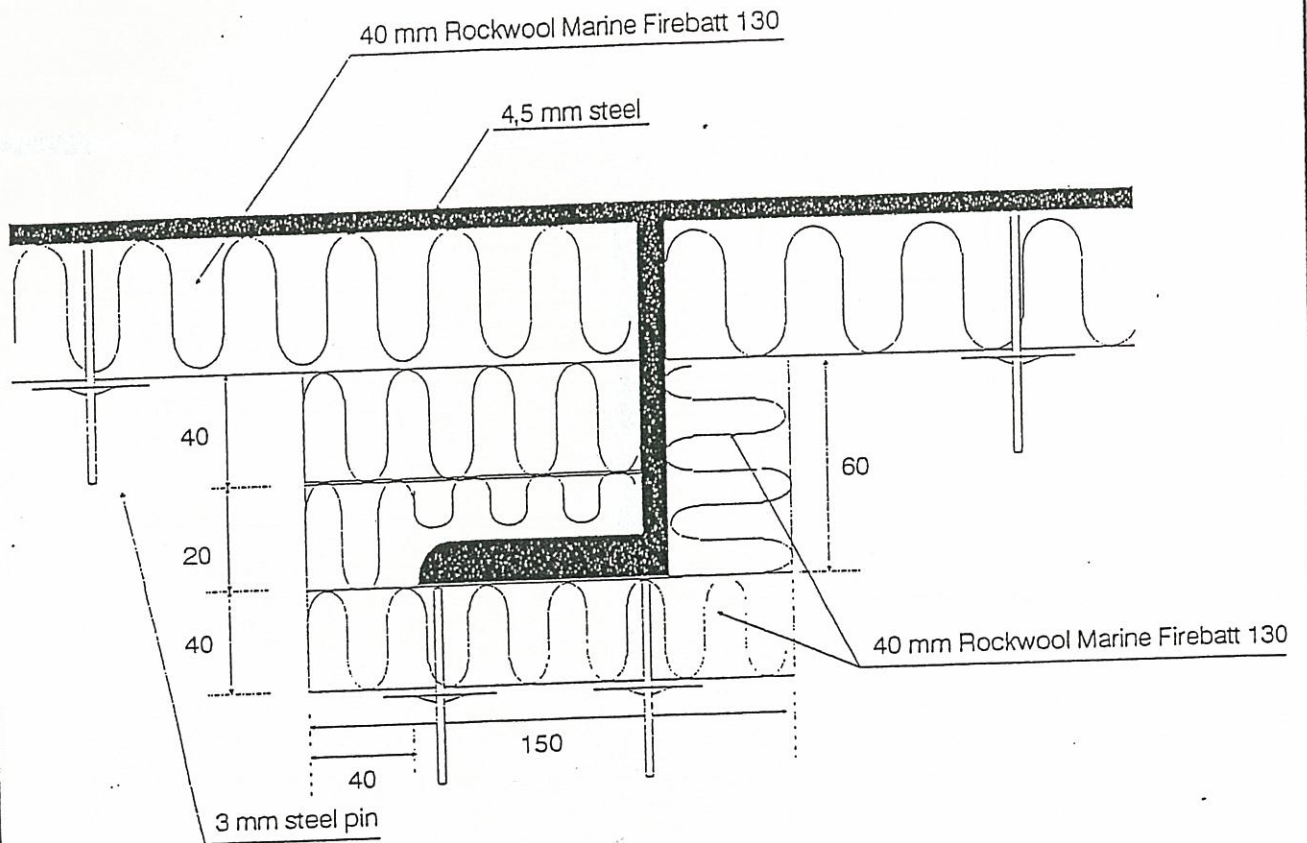

Rockwool A/S	A-60 deck fire insulated with 40 mm Rockwool Marine Fire batts 130.	Drawing nr.:
Date: 12.02.1996		3C

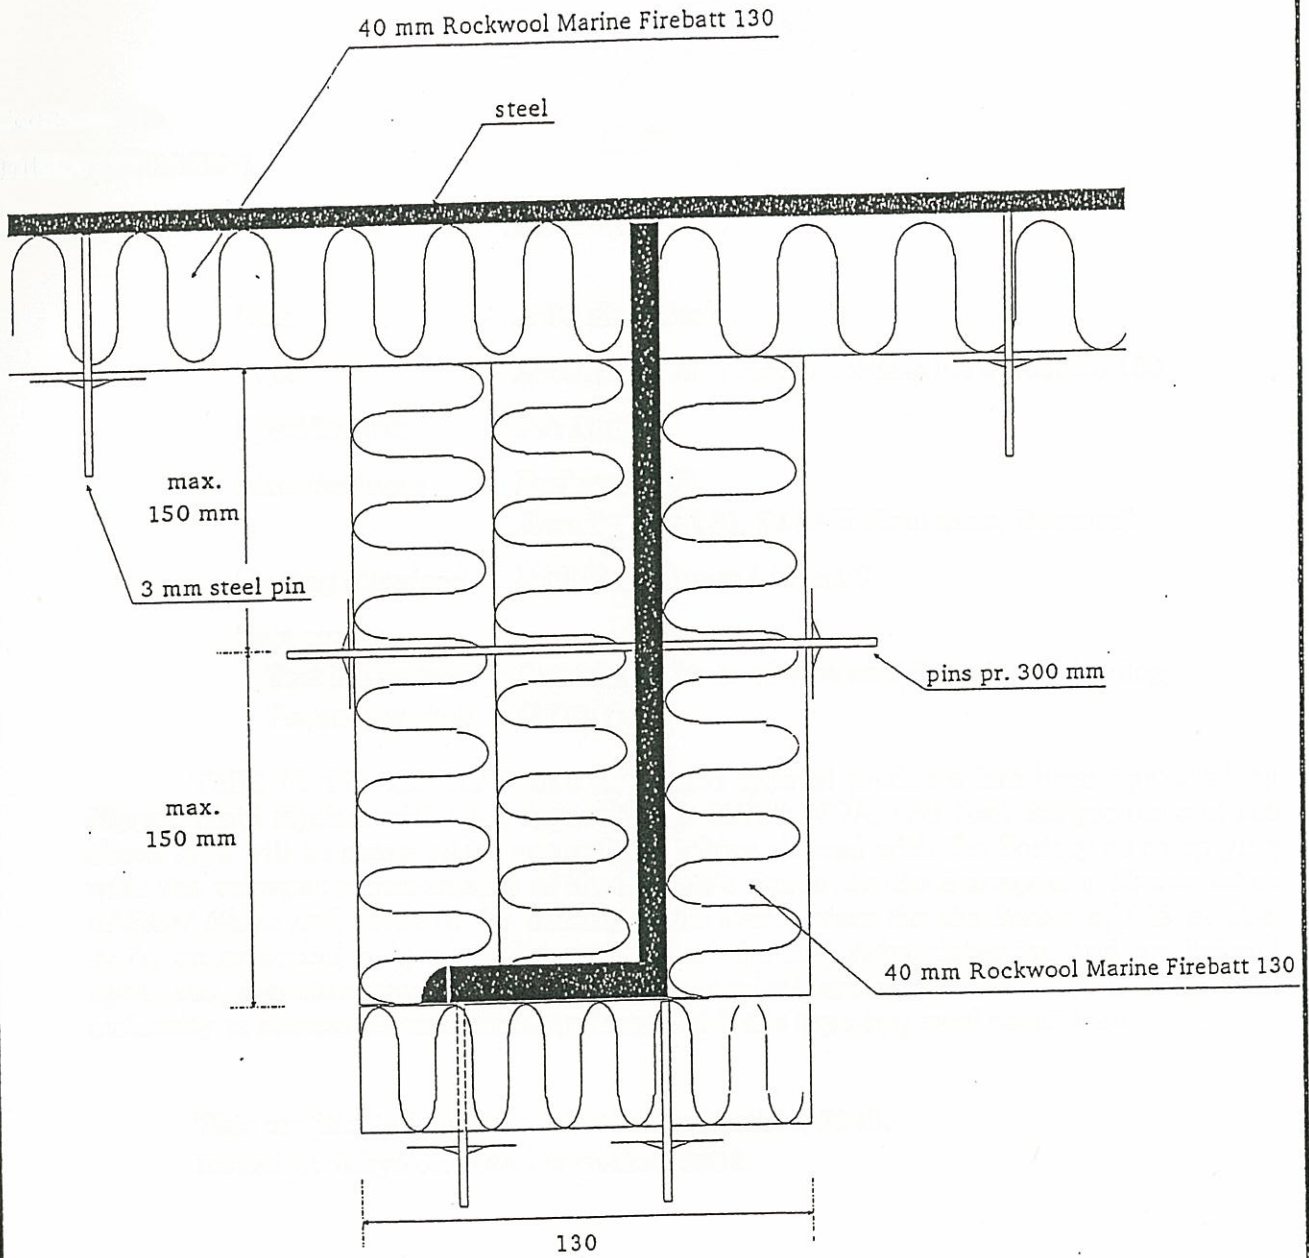

If stiffeners exceed a length of 400 mm, the insulation should only go 400 mm down along the stiffener.

Rockwool A/S

Date: 12.02.1996

A-60 deck
fire insulated with
40 mm Rockwool Marine Fire batts 130.

Drawing nr.:

3d